


## Gas Drill

### Tanaka Gas Drill - TED-262L

This drill has a unique locking mechanism which allows you to manually reverse the drilling direction. Dual position front handle can be mounted on either side for added versatility. The rear handle brace provides the rear handle with added stability. EPA approved.

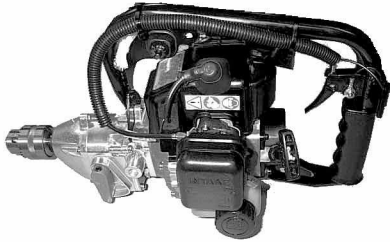

### Tanaka Gas Drill - TED-262R

This drill has a powered reversing feature that allows you to instantly reverse drilling direction with the push of a lever. Dual position front handle can be mounted on either side for added versatility. The rear handle brace provides the rear handle with added stability. EPA approved.

### Power Bits

These bits have a new, patented design for improved cutting and cleaner holes. Self-feeding screw point draws bit through wood. A unique, patented design cutting angle provides smoother starts, and reduces cutting loads. Made of heat-treated steel.



Catalog No.	Hole Dia. in - mm	Hex Shank in - mm	Weight lbs - g
66PT-11/16	11/16 - 17.5	7/16 - 11.1	1 - 454
66PT-13/16	13/16 - 20.6	7/16 - 11.1	1.2 - 545
66PT-15/16	15/16 - 23.8	7/16 - 11.1	1.6 - 726

**Visit our website:  
www.Brenco-Inc.com**

### Impact Bits

Quickly bore through creosoted and salt treated utility poles. Resists wear, eats through nails and staples. Self-feeding screw point draws the bit through the wood. 7/16" hex shank to fit impact drivers. Available in 18" overall length.



Catalog No.	Hardware Dia. in - mm	Hole Dia. in - mm	Weight lbs - g
37868	9/16 - 14.3	5/8 - 15.9	0.9 - 409
37869	11/16 - 17.5	3/4 - 19.1	1.1 - 499
37870	13/16 - 20.6	7/8 - 22.2	1.4 - 636
37871	15/16 - 23.8	1 - 25.4	1.5 - 681
37872	1 1/16 - 27	1 1/8 - 28.6	1.7 - 772

### Eliminator Bits

The Eliminator allows you to bore holes in all types of wood quickly, leaving little or no residue. It requires less torque to operate and can be used with electric, air, or gasoline powered drill motors and impact wrenches.



Catalog No.	Size	Length	Flute Length
ER72109	9/16"	24"	21"
ER72111	11/16"	24"	21"
ER72113	13/16"	24"	21"
ER72115	15/16"	24"	21"
ER72117	1 1/16"	24"	21"

\*Other sizes also available.

**Please call us if you don't see  
what you are looking for!!**

## Sockets

### Deep Length Sockets - 6 Point



Catalog No.	Inch	Length
7312H	3/8"	3 1/4"
7314H	7/16"	3 1/4"
7316H	1/2"	3 1/4"
7318H	9/16"	3 1/4"
7320H	5/8"	3 1/4"
7322H	11/16"	3 1/4"
7324H	3/4"	3 1/4"
7326H	13/16"	3 1/4"
7328H	7/8"	3 1/2"
7330H	15/16"	3 1/2"
7332H	1"	3 1/2"
7334H	1 1/16"	3 1/2"
7336H	1 1/8"	3 1/2"
7338H	1 3/16"	3 1/2"
7340H	1 1/4"	3 1/2"
7342H	1 5/16"	3 1/2"
7344H	1 3/8"	3 1/2"
7346H	1 7/16"	3 1/2"
7348H	1 1/2"	3 1/2"

Visit Our Website:  
[www.Brenco-Inc.com](http://www.Brenco-Inc.com)

### Deep Length Sockets - 12 Point



Catalog No.	Inch	Length
7314	7/16"	3 1/4"
7316	1/2"	3 1/4"
7318	9/16"	3 1/4"
7320	5/8"	3 1/4"
7324	3/4"	3 1/4"
7326	13/16"	3 1/4"
7328	7/8"	3 1/2"
7330	15/16"	3 1/2"
7332	1"	3 1/2"
7334	1 1/16"	3 1/2"
7336	1 1/8"	3 1/2"
7338	1 3/16"	3 1/2"
7340	1 1/4"	3 1/2"
7342	1 5/16"	3 1/2"

### 1/2" Drive Impact, Deep Length-8 Point Sockets

Catalog No.	Inch	Length
7316S	1/2"	3 1/4"
7318S	9/16"	3 1/4"
7320S	5/8"	3 1/4"
7322S	11/16"	3 1/4"
7324S	3/4"	3 1/4"
7326S	13/16"	3 1/4"
7328S	7/8"	3 1/2"
7330S	15/16"	3 1/2"
7332S	1"	3 1/2"

## Sockets

### Nut Runner

Openings for four common square nut sizes; 3/4", 13/16", 1", 1-1/8". Deep well accepts up to 6" excess bolt length. 7/16" hex quick-change adapter included. Slim profile for easy use and storage.



Catalog No.	Length w/ Adapter	Length wo/ Adapter	Diameter	Weight
NR1	9 1/2"	7 3/4"	1 3/4"	1.5 lbs.
49782	Adapter for the NR1 Nut Runner			

### Adapters



Catalog No.	Description
Standard Duty	
4-33B	7/16" x 1/2" Square Drive
Heavy Duty	
49314	7/16" x 1/2" Square Drive

### Dual Socket - 2 in 1



Catalog No.	Description
Z-081315S5	1/2 Drive x 1" x 1 1/8"
Z-081618S5	1/2 Drive x 13/16" x 15/16"



**Visit Our Website!**  
**www.Brenco-Inc.com**